
Astro Offshore
An Adani Group Company

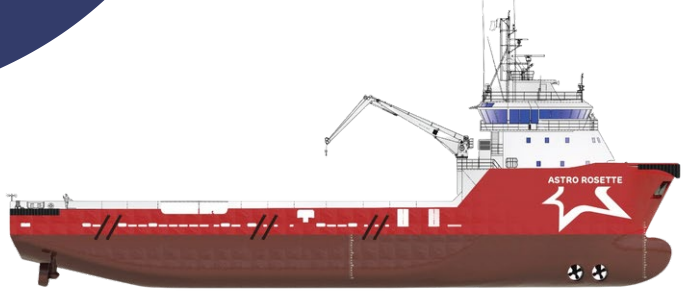

ASTRO ROSETTE

79M DIESEL ELECTRIC DP2 PLATFORM SUPPLY VESSEL

GENERAL

Year Built:	2018
Class:	ABS
Class Notation:	A1, Offshore Support Vessel (FFV 1, Supply-HNLS), AMS, ABCU, DPS-2 BWT, ENVIRO, HAB (l), HDC (5 t/m2, main deck Fr.-8 to Fr.79), HLC (2.8, Circular Tk. No. 1-8), OSR-C2,UWILD

PRINCIPAL PARTICULARS

Length OA:	78.70m
Breadth Moulded:	16.00m
Depth:	7.0m
Draft (Max):	5.80m
Deadweight:	3,139T
Gross Tonnage:	2,638T
Net Tonnage:	984T
Dynamic Positioning:	DP2

PERFORMANCE

Eco Speed:	11 Knots
Service Speed:	12 Knots
Max Speed:	14.5 Knots

MACHINERY

Propulsion:	2 x 1,470KW Abt. 2,940Kw Rolls-Royce US 205 CP
Main Generators:	4 x 994kW CAT C 32 ACERT V8 4 stroke USA 440V 3Ph 60 Hz
Emergency Generator:	1 x 99ekW CAT USA 440V 3Ph 60 Hz
Bow Thrusters:	2 x 10+ T Rolls-Royce tunnel thrusters type TT1850 DPN CP

SAFETY EQUIPMENT

Fire Fighting:	2 x 1,600m³ / hr @ 135m (As per SOLAS)
Oil Dispersant:	2 x 6m spray booms with nozzles
Monitors:	2 x 1,200m³ / hr (water)

RESCUE EQUIPMENT

Rescue Boat:	1 x 6 Man DNV / ABS Class

ACCOMMODATION

One Man Cabins:	8
Two Man Cabins:	8
Four Man Cabins:	1
Total POB:	28

DECK EQUIPMENT

Deck Space:	730m² Wooden = 680m²
Winch Model:	Rolls-Royce Brattvaag
Capstan:	2 x 9T Rolls-Royce Brattvaag

CAPACITIES

Fuel Oil:	884m³
Ballast / Drill Water:	1,599m³
Fresh Water:	465m³
Base Oil:	160m³
Recovery Oil:	1,101m³
Liquid Mud:	818m³
Liquid Brine:	818m³
Dry Bulk:	251m³
Methanol:	135m³

DISCHARGE RATES

Fuel Oil:	1 x 170m³ / hr x 90m head
Ballast / Drill Water:	1 x 150m³ / hr x 90m head
Fresh Water:	1 x 150m³ / hr x 90m head
Base Oil:	1 x 100m³ / hr x 90m head
Liquid Mud:	2 x 100m³ / hr @ 180m head
Liquid Brine:	1 x 75m³ / hr x 180m head
Dry Bulk:	2 x 22.8m³ / hr @ 5.5 BAR
Methanol:	2 x 80m³ / hr @ 90m head

NAVIGATION

ECDIS:	2
AIS:	✓
Radars:	✓
DGPS:	✓
Echo Sounder:	✓
Autopilot:	✓
Gyro Compass:	✓
Speed Log:	✓
Magnetic Compass:	✓
Weather Fax SSAS	✓
BNWAS:	✓

COMMUNICATION

GMDSS:	A1, A2 & A3 Operations
Starlink:	✓
NAVTEX:	✓

GENERAL ARRANGEMENTS


Rev.	Date	Reason for issue	Made by	Chk'd by	Eng. appr.	Client appr.
Final	11.11.13	GENERAL UPDATE	LC			
C	01.09.11	NEW REVISION DUE TO TRANSFER OF DOCUMENTATION TO FSES	BS			
BW	15.06.11	GENERAL UPDATE	LG/BS			
A	16.05.11	CHANGE AS PER OWNERS' COMMENTS.	JP/dW/pkf			

CUSTOMER: FUJIAN SOUTHEAST SHIPYARD
Yard no.: NC 708
Rolls-Royce Marine AS dept. Ship Technology - Offshore
UT-Design™


TITLE: GENERAL ARRANGEMENT

Scale	Format	PROJECT NO.	SFI no.	Seq. no.	Revision
1:150	A0	087106 - 101 - 002			Final


This drawing/specification is the property of Rolls-Royce Marine AS, dept. Ship Technology - Offshore, and must not be copied or the contents thereof or any information revealed in conjunction therewith must not be imported to any unauthorised third party, it must not be used for any other project than for which it was originally ordered. The receipt of the drawing / specification implies that the conditions mentioned herein are accepted.

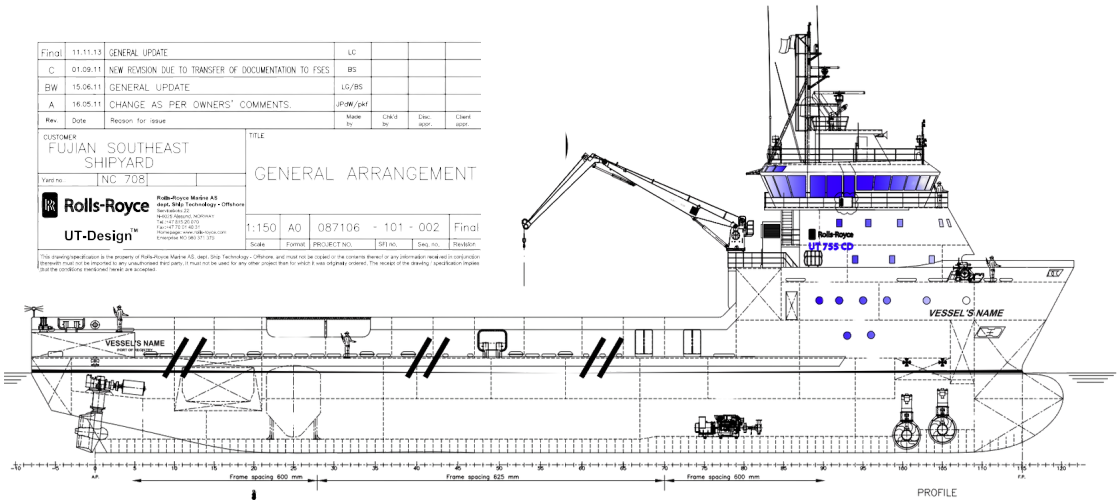


PROFILE




MIDSHIP SECTION




SECTION AZIMUTH UNITS

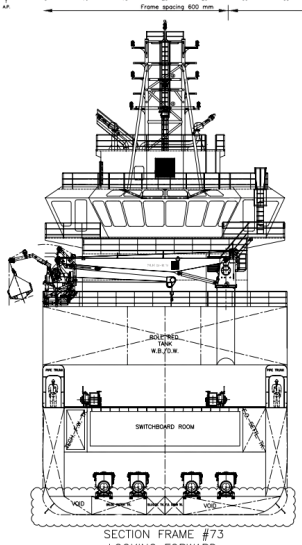


SECTION FRAME #73
LOOKING FORWARD




WHEELHOUSE TOP




BRIDGE DECK




C-DECK (5)
5 x 1M

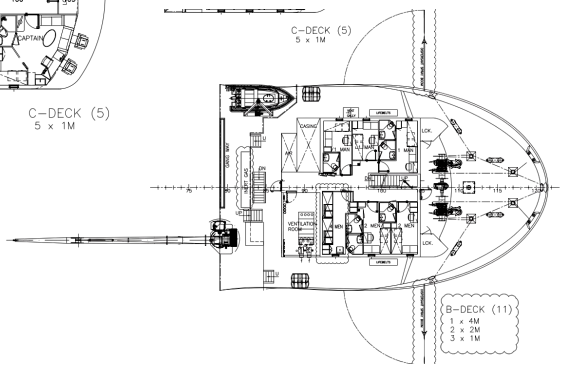


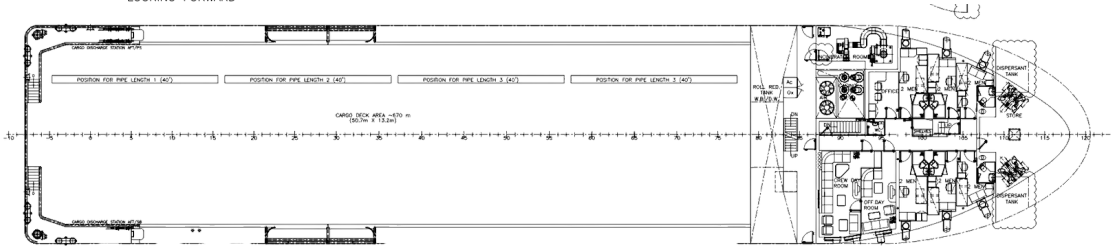


A-DECK (12)
6 x 2M




SECTION FRAME #25

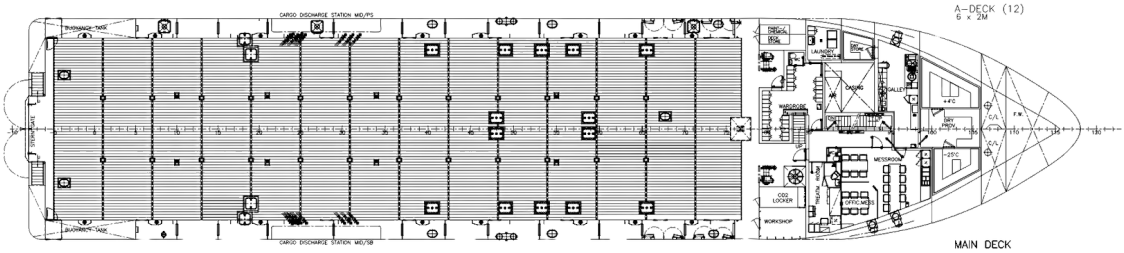

MAIN DECK

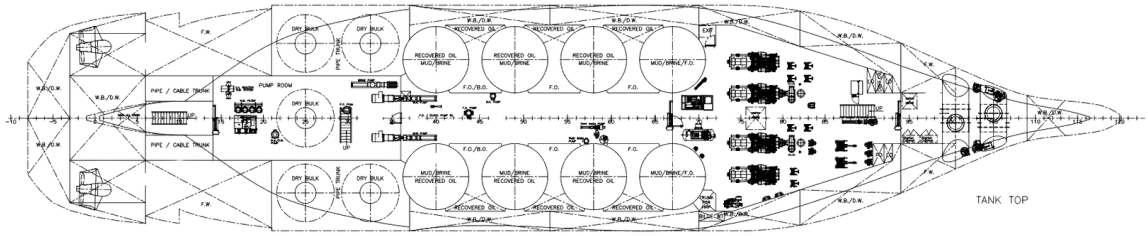

TANK TOP

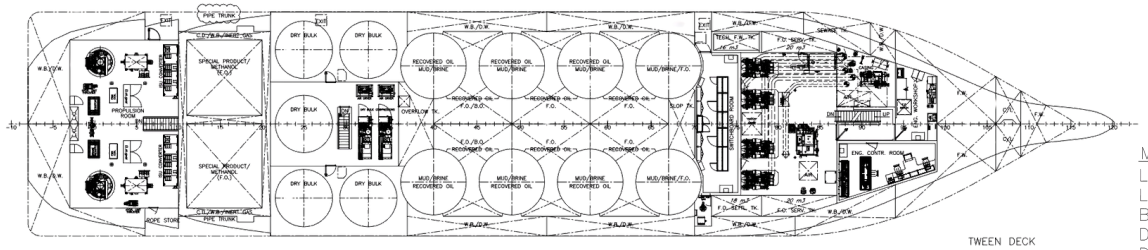

TWEEN DECK

MAIN PARTICULARS

L.O.A.	APPROX. 78.70	m
L.P.P.	70.10	m
BREADTH MLD.	16.00	m
DEPTH MAIN DK.	7.00	m
DESIGN DRAFT.	5.10	m
MAX DRAFT.	APPROX. 5.90	m

All particulars are believed to be correct but without guarantee